

# DURACELL


PHOTO

# ULTRA

# Ultra CR2


## Lithium/Manganese Dioxide

Li/MnO<sub>2</sub>

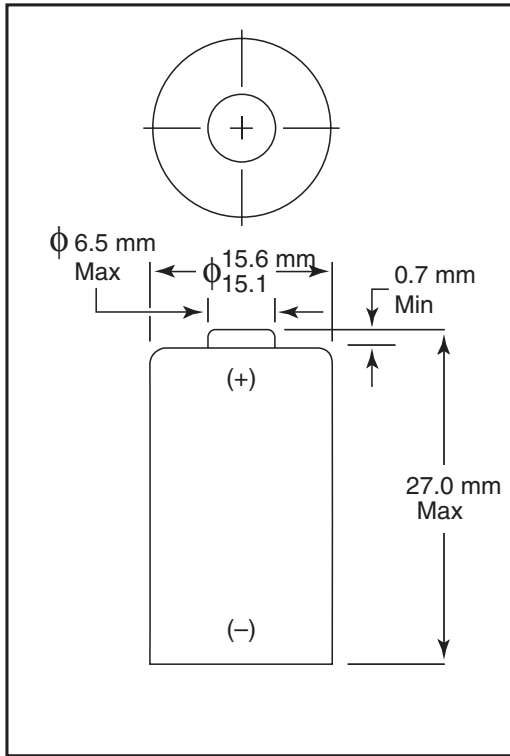


Nominal Voltage:	3.0 V
Typical Voltage:	3.2-3.3 V
Nominal Internal Impedance:	0.3 ohm @ 1kHz
Average Weight:	11 g
Volume:	5.168 cm. <sup>3</sup>
Terminals:	Flat, Recessed Negative Terminal, Nickel Plated Steel
Operating Temp. Range:	-20°C to 75°C (-4°F to 167°F)
NEDA/ANSI:	CR2
IEC:	-

Delivered Energy vs. Power Drain  
@ Various Cutoff Voltage - Room Temperature

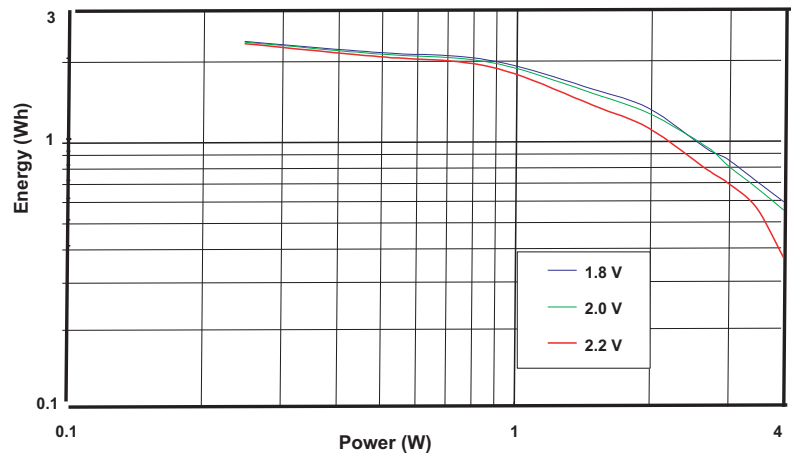


### Duracell Ultra CR2 Typical Performance


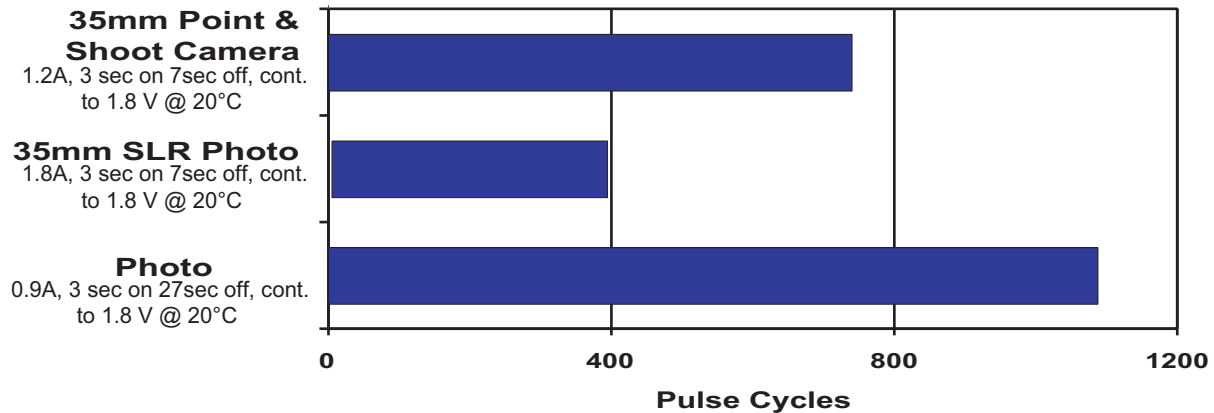


\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


1.8 Amp 3 sec on/ 7 sec off  
@ Various Temperatures

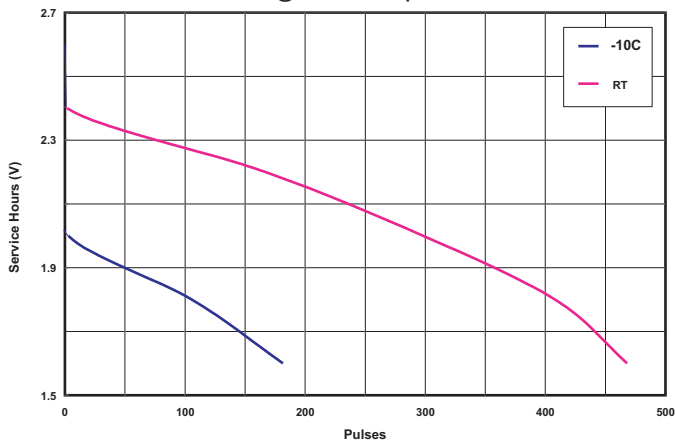

1.2 Amp, 3 sec on/ 7 sec off  
@ Various Temperatures

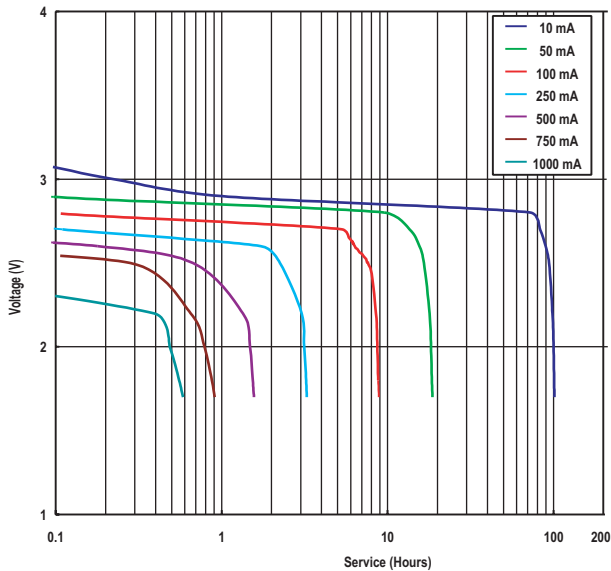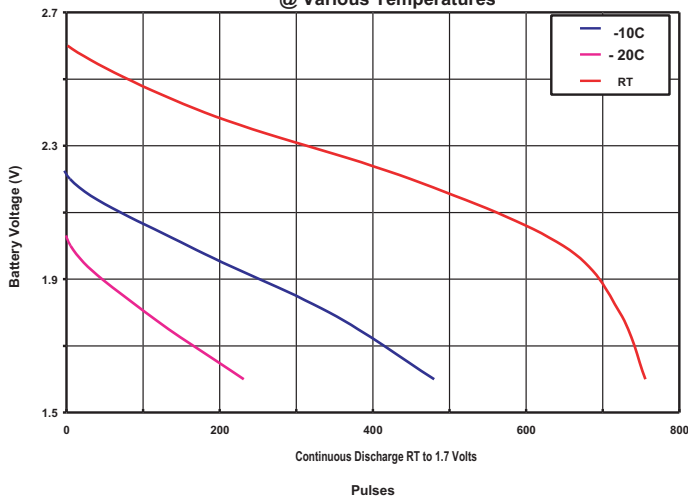

0.9 Amp, 3 sec on/27 sec off  
@ Various Temperatures

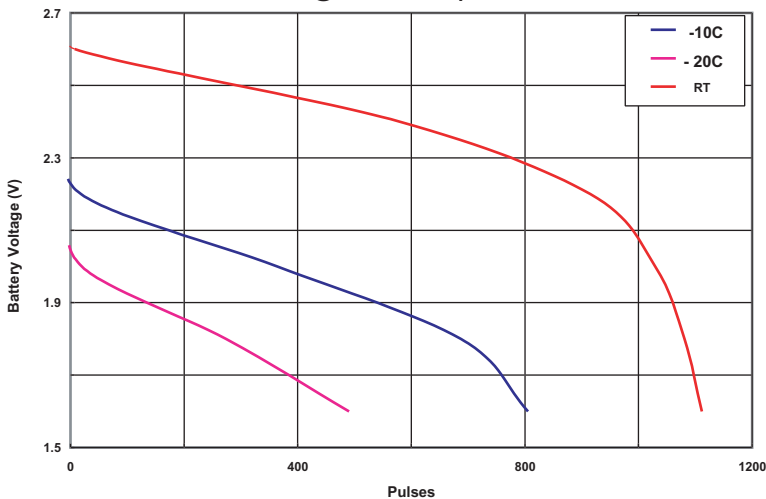

## DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.